



Innovative Photonic Solutions

6000 Series

NEMA 12

Dual and Triple Channel Industrial Lightsources

KEY FEATURES

- Two Channel Version 6020
- Three Channel Version 6030
- Factory Floor Reliability
- Full NEMA 12 Rating
- Air-to-Air Heat Exchanger
 - No intrusion of factory air
 - No compressed air required
 - No water lines or chillers
 - *Plug it in and Go!*
- Contamination Resistant
 - Dirt & Dust
 - Debris & Particulates
 - Oil Vapor
 - Non-Corrosive Vapors
- Ultra Stable Light Output
- Rugged, Proven Performance
- Available in NEMA 4/4X

APPLICATIONS

- Automotive Factories
- Machining or Fabrication
- Glass Container Production
- Web, Sheet & Rolling Mills
 - Steel, Aluminum, Metals
 - Plastics & Glass
 - Textiles & Wood
- Liquid/Consumer Packaging
- Food & Pharmaceuticals



Ultra Stability

DC Regulation combined with the proprietary *Light-Lock™* light feedback system provide the most stable light intensity and spectral output in the industry - over the entire life of the 150 watt tungsten halogen lamp. An absolute must for ensuring robust and reliable performance from industrial machine vision sensors and systems.



Easy to Operate

Just plug it in and go! No compressed air to hook up and filter. No coolant lines to run; no chillers to break down. Specialty engineered air-to-air heat exchanger ensures that the factory air is completely isolated from all internal optical and electronic elements, eliminating premature failure and ensuring robust, reliable performance.

Easy to Maintain

Low maintenance design and internal self-diagnostics circuitry keeps downtime to a minimum. Host is alerted of any potential problems via the RS-232/485 serial communications interface. As with all the *Smart-Lite™* family of lightsources, the 3900-N12 accepts all standard accessories, color filters, lamp options, and our entire line of standard and customized fiber optic light delivery components.

Enclosure Detail Drawing

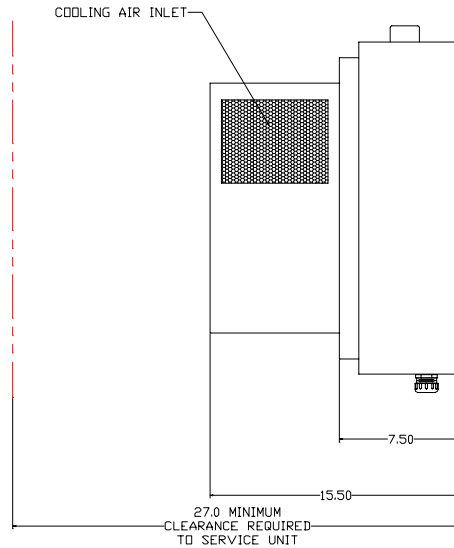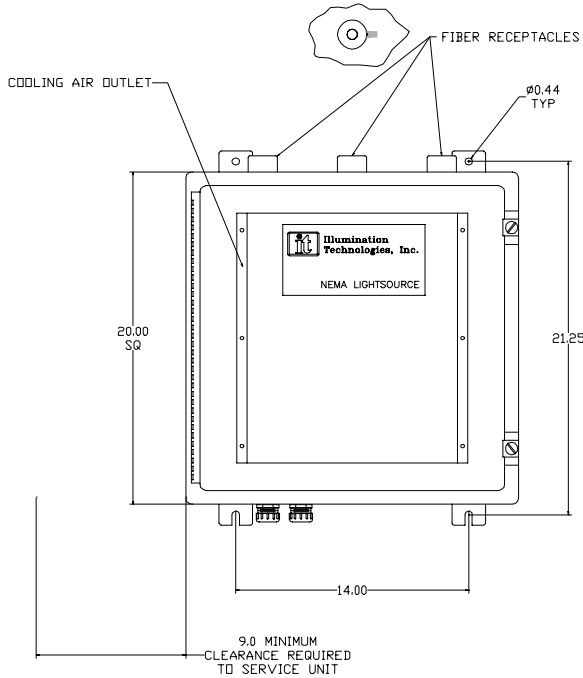

Technical Specifications

Physical

Height: 15.5" (394 mm)
 Width: 20.0" (508 mm)
 Length: 20.0" (508mm)
 Weight: (6020) 78.0lbs (35.4 kg)
 Weight: (6030) 92.0lbs(41.7 kg)

Electrical

Input: 100/120/220/240
 (selectable)
 50/60Hz
 Input Power: 100/120V 290W
 220/240V 360W
 Inrush Current: 100/120V 3.6A
 220/240V 2.6A
 Overvoltage: Category II

Output Stability

Regulation: 0.1% (Photometric)
 Noise: 0.1% (Photometric)
 Long-term: 1.0% (Photometric)

Regulation Scheme

Short-term: Linear DC Regulator
 Long-term: Optical Light Feedback

Environmental

Temperature: 0 to 40C
 Relative Humidity: 0 to 95%
 Altitude Rating: 2000m (max)
 Pollution Rating: Pollution Degree 2

Control

Manual: Internal Pots
 Analog: 0-5 VDC (Linear)
 Serial: RS-232 or RS-485
 SS Relay: Analog & Serial

Diagnostics

Lamp Out: Analog & Serial
 Over Temp: Analog & Serial

Lamp

Visible: EKE (Ushio)
 High Color: EKE-HC (Ushio)
 Extended Range: EKE-ER (IT)
 NIR: EKE-IR (IT)

Proudly Distributed By:



Illumination Technologies, Inc.

5 Adler Drive 1 East Syracuse 1 New York 13057 USA
 TEL: 315-463-4673 1 FAX: 315-463-1401 1 Toll Free (North America): 800-738-4297
 Web: <http://www.illuminationtech.com> 1 E-mail: info@illuminationtech.com